


Exciter ST8C

Exciter ST8C

IEEE Std 421.5-2016 Exciter with static potential-compound source

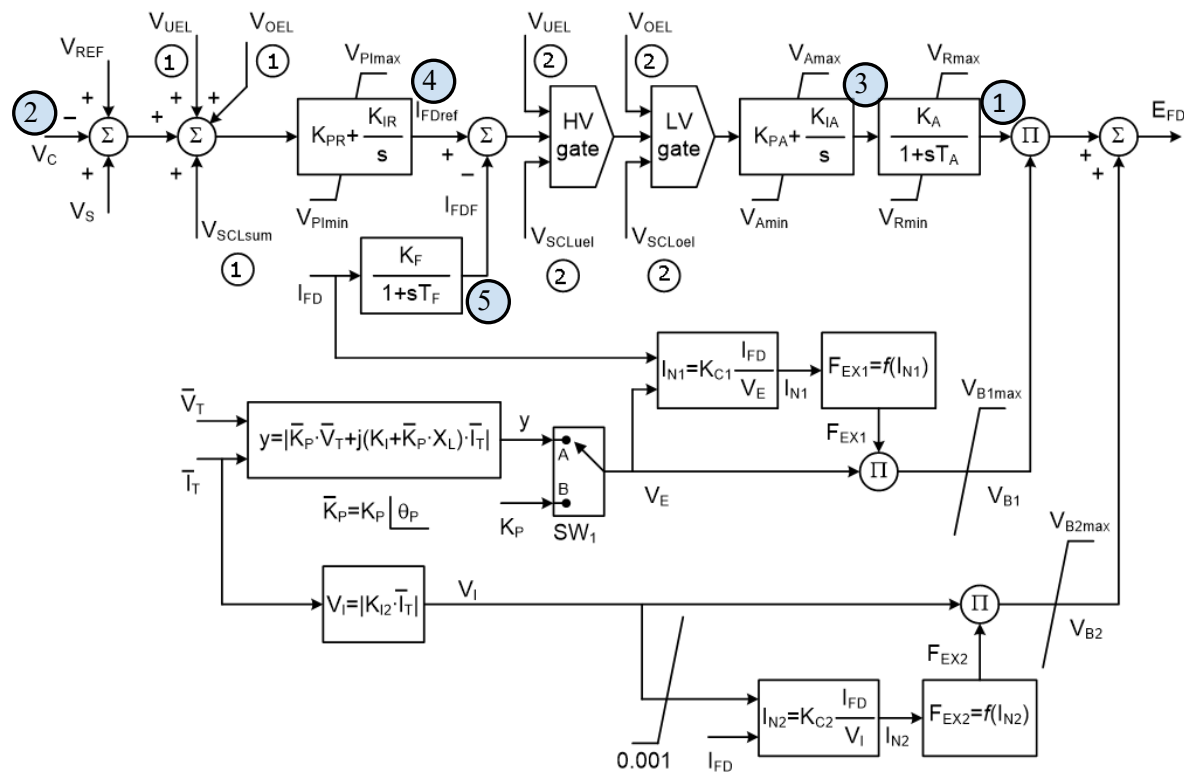

States:

- 1 – V_R
- 2 – Sensed V_T
- 3 – V_A
- 4 – I_{FDref}
- 5 – I_{FDF}

alternate SCL input locations (V_{SCL})

- ① summation point
- ② take-over

alternate OEL input locations (V_{OEL})

- ① summation point
- ② take-over

alternate UEL input locations
(V_{UEL})

- ① summation point
- ② take-over